

Friction Stir Welding Equipment Optimisation

D.Jakeer Hussain¹, U.Dinesh Kumar²

^{1,2}Assistant Professor, Department Of Mechanical Engineering, CVRT Engineering college, Tadipatri

ABSTRACT

Friction-stir welding, or FSW for short, is a technique for combining controlled surfaces that uses an external tool in place of melting steel. This method falls under the category of solid-state joining. The gadget and some of the cloth generate heat, which leads to a rather straightforward positioning near the FSW instrument.


Subsequently, the two metal quantities are mechanically mixed in the joint area. Next, using mechanical force (given via the device's mechanism), which is comparable to connecting dough or clay, the metal—which has softened due to the elevated temperature—may be joined. The circular tool we constructed for this project revolved at 1000 revolutions per minute after introducing thermal (temperatures and convection on plates and device additionally) and static (device rotational tempo of 1000 rpm) boundary conditions. and the calculated findings, which include a wide range of topics including warmth flow and deformation pressure.

Three other gears in the shapes of a pentagon, a tapering pentagon, and a truncated pentagon were also built in this research. To ascertain which device may be used in lieu of a spherical device, we performed the identical boundary condition with the same material characteristics and calculated all of the findings from these sorts of outcomes.

1. INTRODUCTION

Friction-stir welding (FSW) is a strong-state becoming a member of method (the metallic isn't always melted) that uses a 3rd frame device to sign up for managing surfaces. Heat is generated most of the device and material which results in a very soft area close to the FSW device. It then automatically intermixes the two portions of steel at the vicinity of the joint, then the softened metallic (due to the stepped forward temperature) can be joined the use of mechanical stress (this is completed thru way of means of the tool), similar to becoming a member of clay, or dough.

It is more often than not used on aluminium, and most often on extruded aluminium (non-warmth treatable alloys), and on systems which want advanced weld energy with out a positioned up weld warmth treatment. It become invented and experimentally validated at The Welding Institute UK in December 1991. TWI holds patents at the procedure, the number one being the maximum descriptive.

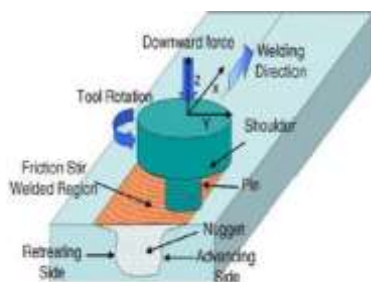

Friction stir welding schematic diagram

Micro structural features

A highly distinctive microstructure is produced by the FSW process's solid-state nature, unusual tool, and asymmetric nature. Zones can be used to separate the microstructure:

1. A closely deformed area of fabric called the stir area, also referred to as the nugget or dynamically recrystallised zone, is kind of in which the pin is placed during welding. The stir quarter's grains are kind of equiaxed and frequently an order of importance smaller than the parent fabric's grains. An "onion-ring" structure, the common occurrence of more than one concentric earrings, is a special feature of the stir zone. Although versions in particle number density, grain length, and texture have all been counseled, the perfect foundation of these rings has no longer been decided.
2. The cloth this is deposited on the advancing side of the weld is dragged with the aid of the shoulder from the chickening out side of the weld across the tool's rear and into the waft arm sector at the higher floor of the weld.
3. The stir area is flanked by using the thermo-automatically affected quarter (TMAZ). Welding has a smaller effect at the microstructure on this region because of decrease pressure and temperature. The microstructure is certainly that of the determine cloth, albeit considerably deformed and turned around, in contrast to the stir area.
4. The heat-affected sector (HAZ) is not unusual to all welding techniques. Although the term "TMAZ" technically refers back to the whole deformed vicinity, it's miles often used to describe any location that isn't already included by means of the phrases "stir zone" and "flow arm." This area undergoes a thermal cycle, as indicated by using its name, but is not deformed at some point of welding. Although the temperatures are decrease than the ones within the TMAZ, if the microstructure is thermally unstable, they'll still have a vast impact. In reality, this region typically well-knownshows the weakest mechanical houses in age-hardened aluminum alloys.

2. LITERATURE REVIEWS

Kumaran et al.(2011) In this research numerous advancements have been occurring in the field of materials processing. Friction welding is an important solid-state joining technique. In this research project, friction welding of tube-to-tube plate using an external tool (FWTPET) has been performed, and the process parameters have been prioritized using Taguchi's L27 orthogonal array. Genetic algorithm (GA) is used to optimize the welding process parameters. The practical significance of applying GA to FWTPET process has been validated by means of computing the deviation between predicted and experimentally obtained welding process parameters.

Elangovan et al.(2012)The researchers in this paper focuses on the development of an effective methodology to determine the optimum welding conditions that maximize the strength of joints produced by ultrasonic welding using response surface methodology (RSM) coupled with genetic algorithm (GA). RSM is utilized to create an efficient analytical model for welding strength in terms of welding parameters namely pressure, weld time, and amplitude. Experiments were conducted as per central composite design of experiments for spot and seam welding of 0.3- and 0.4- mm-thick Al specimens. An effective second-order response surface model is developed utilizing experimental measurements. Response surface model is further interfaced with GA to optimize the welding conditions for desired weld strength. Optimum welding conditions produced from GA are verified with experimental results and are found to be in good agreement.

Mariano et al. (2012) presents a literature review on friction stir welding (FSW) modelling with a special focus on the heat generation due to the contact conditions between the FSW tool and the work piece. The physical process is described and the main process parameters that are relevant to its modelling are highlighted. The contact conditions (sliding/sticking) are presented as well as an analytical model that allows estimating the associated heat generation. The modelling of the FSW process requires the knowledge of the heat loss mechanisms, which are discussed mainly considering the more commonly adopted formulations.

Ni (2014) observed that the Thin sheets of aluminium alloy 6061-T6 and one type of Advanced high strength steel, transformation induced plasticity (TRIP) steel have been successfully butt joined using friction stir welding (FSW) technique. The maximum ultimate tensile strength can reach 85% of the base aluminium alloy. Inter-metallic compound (IMC) layer of FeAl or Fe₃Al with thickness of less than 1 μ m was formed at the Al-Fe interface in the advancing side, which can actually contribute to the joint strength.

Simoes a, (2013) their work describes the thermomechanical conditions during Friction Stir Welding (FSW) of metals have already been subject of extensive analysis and thoroughly discussed in literature, in which concerns the FSW of polymers, the information regarding this subject is still very scarce. In this work, an analysis of the material flow and thermo-mechanical phenomena taking place during FSW of polymers is performed. The analysis is based on a literature review and on the examination of friction stir welds, produced under varied FSW conditions, on polymethyl methacrylate (PMMA).

SOLID WORKS

SOLID WORKS is a group of packages that may be used to design, analyze, and convey genuinely any sort of product.

SOLID WORKS is a parametric, characteristic-based totally stable modeling gadget. By "feature based," we imply that in preference to specifying low-stage geometry like traces, arcs, and circles, you may define features like pads, ribs, slots, holes, and rounds to create components and assemblies. Features are targeted by placing values and attributes of factors like reference planes or surfaces, sample parameters, form, and dimensions, and others.

The time period "parametric" refers to an assembly or component whose bodily form is determined by means of the values assigned to its attributes (normally its dimensions). Any time, Parametric can define or change a characteristic's dimensions or other attributes.

For instance, in case your layout goal is to middle a hole on a block, you could use a numerical formula to attach the hole's dimensional place to the block's dimensions; The

function of the centred hollow might be automatically calculated if the block's dimensions change.

The term "stable modeling" refers back to the capability of the pc version used to create it to incorporate all the facts that might be present on a genuine stable item. The fact that a pc version cannot be ambiguous or bodily non-realizable is the stable modeling's best gain.

There are six core SOLID WORKS concepts. Those are:

- Solid Modelling
- Feature Based
- Parametric
- Parent / Child Relationships
- Associative
- Model Centric

ANSYS


An all-cause suite of software for finite element analysis (FEA) is ANSYS. A numerical approach referred to as Finite Element Analysis is used to interrupt down a complicated system into very small pieces called factors that may be any length specified by using the consumer. Equations that manipulate these elements' behavior are positioned into movement and solved through the software program; developing a complete explanation of the machine's basic operation. The consequences can then be provided graphically or tabulated. Typically, this kind of analysis is used to design and improve a device that is too complicated to manually analyze. Due to their geometry, scale, or governing equations, systems that might fall into this class are too complicated.

In many faculties' Mechanical Engineering departments, ANSYS is the standard FEA coaching tool. In addition, Civil and Electrical Engineering, Physics, and Chemistry departments use ANSYS.

The virtual performance of products or approaches can be investigated at a low fee using ANSYS. Virtual prototyping is the call given to this approach of product development.

Users can iterate on a diffusion of situations the use of virtual prototyping techniques to enhance the product long earlier than manufacturing starts. Risk and the fee of useless designs can each be reduced due to this. Users may also be able to see how a layout affects the product's electromagnetic, thermal, mechanical, and other conduct way to ANSYS's multifaceted nature.

MODELS

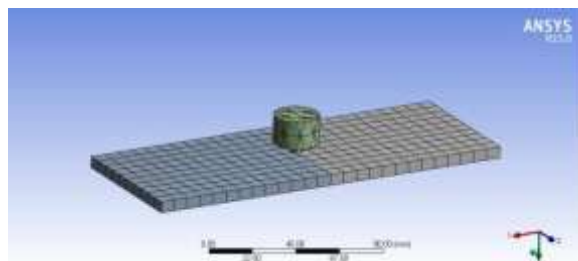


Model in Ansys

After finishing touch of meshing now we ought to practice boundary situations according to our requirement. Here we our plates will be restoration in 4 instructions to do this right here

we must select constant supports to all four facets. And our device rotate with positive speed so right here we must observe inertial load situations and that inertial conditions is rotational pace with 1000 RPM. And observe pressure on device 2500N.


3. RESULTS AND ANALYSIS

Results (circular tool)

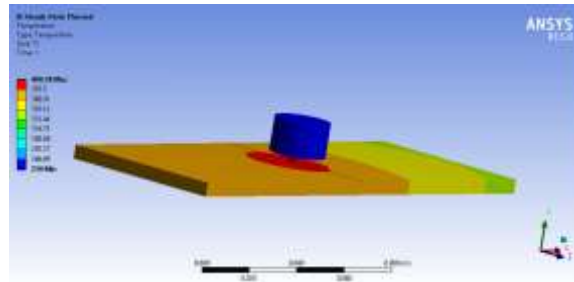

Total temperature for circular tool

The above figure shows the results of circular tool temperature distribution for above applied boundary conditions. And here we have maximum temperature value is 400.18*c which is shown in red colour and minimum value is 250*c which is shown in blue colour.

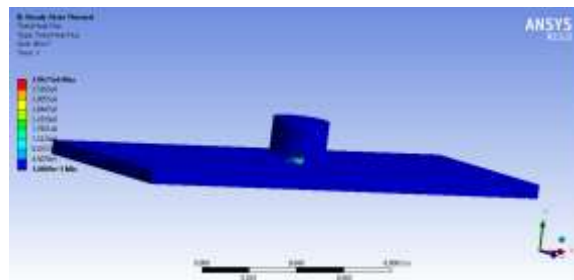


Total Heat Flux Values for Circular Tool

The above figure shows the results of circular tool heat flux distribution for above applied boundary conditions. And here we have maximum temperature value is 3.9671e6/mm² which is shown in red colour and minimum value is 1.0809e-5/mm² which is shown in blue colour.


Results (pentagon tool)

Total temperature

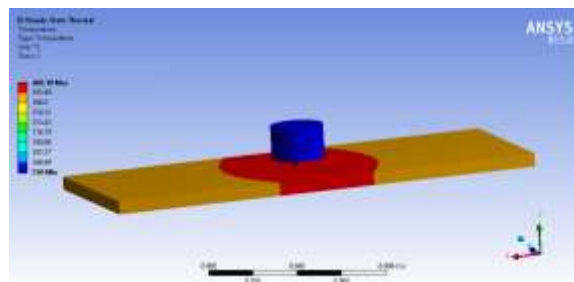

Total temperature for pentagon tool

The above figure shows the results of pentagon tool temperature distribution for above applied boundary conditions. And here we have maximum temperature value is 400.18*c which is shown in red colour and minimum value is 250*c which is shown in blue colour

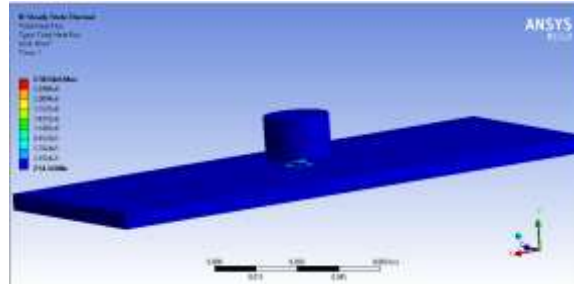


Total heat flux for pentagon tool

The above figure shows the results of pentagon tool heat flux distribution for above applied boundary conditions. And here we have maximum temperature value is 2.5834e6w/mm² which is shown in red colour and minimum value is 214.34w/mm² which is shown in blue colour


Results (tapered tool)

Total temperature

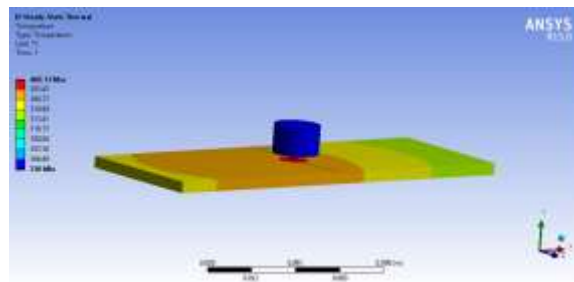

Total temperature for tapered tool

The above figure shows the results of tapered tool temperature distribution for above applied boundary conditions. And here we have maximum temperature value is 400.13*c which is shown in red colour and minimum value is 250*c which is shown in blue colour

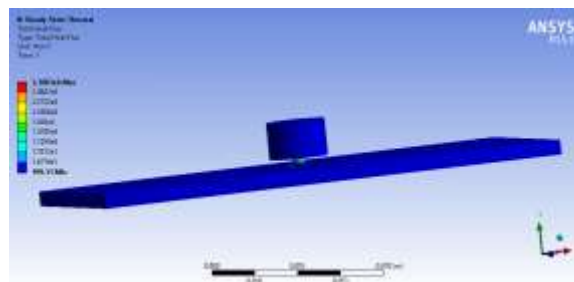


Total heat flux for tapered tool

The above figure shows the results of tapered tool heat flux distribution for above applied boundary conditions. And here we have maximum heat flux is $3.3083 \times 10^6 \text{ w/mm}^2$ which is shown in red colour and minimum value is 199.31 w/mm^2 which is shown in blue colour


Results (truncated tool)

Total temperature

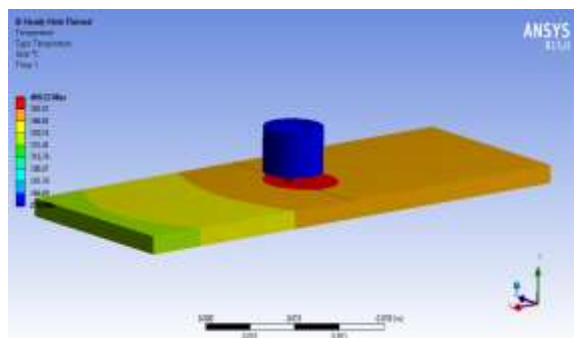

Total temperature for truncated tool

The above figure shows the results of truncated tool temperature distribution for above applied boundary conditions. And here we have maximum temperature value is 400.22°C which is shown in red colour and minimum value is 250°C which is shown in blue colour

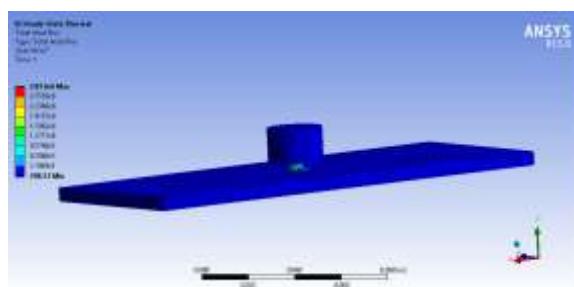

Total heat flux for truncated tool

The above figure shows the results of truncated tool heat flux distribution for above applied boundary conditions. And here we have maximum heat flux is $2.873 \times 10^6 \text{ w/mm}^2$ which is shown in red colour and minimum value is 298.51 w/mm^2 which is shown in blue colour

Table: Analysis results

	Circular tool	Pentagon tool	Tapered tool	Truncated tool
Total temperature($^\circ\text{C}$)	400.18	400.18	400.13	400.22
Total heat flux(w/m^2)	3.9671×10^6	2.5834×10^6	3.3083×10^6	2.873×10^6

4. CONCLUSIONS

In order to accomplish friction stir welding on two different materials (steel and aluminium alloy 6061 plates) at a 1000 rpm speed, we created four different cutting tools for our project:

truncated, tapered, round, and pentagon. The circular tool is regarded as an existing tool in this project. In addition, we applied a 2500N load and conducted analyses on three more tools using identical material and boundary conditions. The findings showed that the truncated tool only produced a stress of 192.23 Mpa, whereas the round tool induced a plate stress of 211.35 Mpa. Then, for each of the four types of tools—round, pentagon, tapered, and truncated—we performed a FEA process thermal analysis to validate the temperature distribution, thermal flux, and stresses at different linear speeds. The findings demonstrate that compared to the truncated tool, the circular tool generates larger stresses and has a higher heat flux and gradient. It also produces the necessary plate melting point temperature. Therefore, we may also use friction stir welding with a truncated tool.

5. REFERENCES

1. Zhang, W., Kim, C. L., and DebRoy, T. 2004. Journal of Applied Physics, 95(9): 52105219.
2. Rai, R., and DebRoy, T. 2006. Journal of Physics, D: Applied Physics, 39(6): 1257–66.
3. Yang, Z., Sista, S., Elmer, J. W., and De Roy, T. 2000. Acta Materialia, 48(20) 4813–4825.
4. Mishra, S., and DebRoy, T. 2004. Acta Materialia, 52(5): 1183–1192.
5. Sista, S., and DebRoy, T. Metallurgical and Materials Transactions, B, 32(6): 1195–1201.
6. Mishra, S., and DebRoy, T. 2004. Journal of Physics D: Applied Physics, 37: 2191–2196.
7. Elmer, J. W., Palmer, T. A., Zhang, W., Wood, B., and DebRoy, T. 2003. Acta Materialia, 51(12): 3333–3349.
8. Zhang, W., Elmer, J. W., and DebRoy, T. 2002. Materials Science and Engineering A, 333(1-2): 320–335.
9. Mundra, K., DebRoy, T., Babu, S. S., and David, S. A. 1997. Welding Journal, 76(4): 163sto 171-s.
10. Hong, T., Pitscheneder, W., and DebRoy, T. 1998. Science and Technology of Welding.
11. Sadeesh P, Venkatesh Kannan M, Rajkumar V, Avinash P, Arivazhagan N, Devendranath Ramkumar K and Narayanan S, “Studies on friction stir welding of AA 2024 and AA 6061 dissimilar metals”, 7 th International conference on materials for advanced technology, 2014, pp. 145–149.
12. Prakash Kumar Sahu and Sukhomay Pal, “Multiresponse optimization of process parameters in friction stir welded AM20 magnesium alloy by Taguchi grey relational analysis”, Journal of Magnesium and Alloys 3, 2015, pp. 36-46.
13. Pankaj Neog, Dharmendra Thakur and Pranav Kumar Pandey, “Optimization of Friction stir welding parameters in joining dissimilar aluminium alloys using SPSS and Taguchi”, Journal of Basic and Applied Engineering Research (JBAER), Volume 1, 2014, pp. 25-27.
14. E. Fereiduni, M. Movahedi and A.H. Kokabi, “Aluminum/steel joints made by an alternative friction stir spot welding process”, Journal of Materials Processing Technology 224, 2015, pp. 1–10.

15. Joon-Tae Yoo, Jong-Hoon Yoon, Kyung-Ju Min and Ho-Sung Lee, “Effect of friction stir welding process parameters on mechanical properties and macro structure of Al-Li alloy”, 2nd International Materials, Industrial, and Manufacturing Engineering Conference, MIMEC2015, 2015, pp. 4-6.
16. RazaMoshwan, FarazilaYusof, M. A. Hassan and S. M. Rahmat, “Effect of tool rotational speed on force generation, microstructure and mechanical properties of friction stir welded Al–Mg–Cr–Mn (AA 5052-O) alloy”, Materials and Design 66, 2015, pp. 118–128.
17. G. I. Shaikh and U. A. Dabade. “Experimental investigation on friction stir welding of dissimilar metals”, 5th National conference on “Recent Advances in Manufacturing (RAM-2015)”, 2015, pp. 15-17.
18. Vinayak D. Yadav and Prof. S. G. Bhatwadekar, “Friction stir welding of dissimilar materials between AA6101 aluminium and pure Copper”, International Journal of Engineering Sciences & Research Technology, 2014, pp. 505-508.
19. S. Jambulingam, “Optimization of process parameters of FSW for dissimilar aluminium alloys AA7075 and AA3014”, International Journal of Emerging Researches in Engineering Science and Technology, volume-2, 2015.
20. Shaikh Mohammed Shakil and Prof. Yagnesh B Chauhan “Optimization of friction stir welding process parameters for welding aluminum alloys”, International Journal of Science Technology & Engineering Volume, 2015, pp. 69-75.