

# **POLLUTION CONTROL BY REPLACEMENT OF CONSTRUCTION MATERIAL USING C&D WASTE .**

**Dr R.Bala murugan, Dr .K.Srinivasan**

Associate professor of civil Engineering , FEAT, Annamalai university , Annamalainagar,  
Chidambaram.-608002

**Abstract:**The reduction of CO<sub>2</sub> emission has recently become a global concern. The use of Portland cement has been responsible for the main global warming effects in the construction industry, Geo-polymer have emerged as a new generation of alternatives. Construction has been most important human activity since early ages. The main aim is to study strength characteristics and flexural behavior of Geo-polymer concrete with Construction Demolition Waste. In this study, Geo-polymer concrete is produced with fly ash, GGBS, and sodium hydroxide and sodium silicate is used as a binder. The mix design is carried out for 12M concentration of sodium hydroxide. Alkaline activator solution ratio of 2.5 and alkaline liquid to fly ash ratio 0.4 is selected for this investigation. The specimen of size 100x100x100mm cubes 100x200mm cylinders and 1200x150x100mm beam were casted and the specimens of Geo-polymer concrete are cured at ambient temperature for 3days, 7 days and 28 days. The cured specimens were then tested for compressive strength, split tensile strength and flexural strength respectively.

**Keywords:***Geo-polymer, Construction And Demolition Waste, Alkaline Activator, Fly ash ,GGBS, Sodium Hydroxide, Sodium Silicate, Compressive Strength, Split Tensile Strength, Flexural Strength.*

## **1. Introduction**

In past century we developed cement concrete as material for construction work. In 1902 August Perret, first designed building in Paris with structural components beams, slabs and columns. Construction sort of infrastructure and industrial sector by concrete makes it's an important product. It is produced by natural materials; it is reliable material, gives architectural freedom. After water most widely consumed material is concrete as more than ton produced every year for each person in the world. But, the environmental hazard caused by production of concrete material has concerned to form an eco-friendly material for construction. It is been studied that embodied carbon dioxide ranges from 700-800 kg CO<sub>2</sub> for a tone of concrete. The embodied carbon dioxide varies depending upon methods and type of mix design. In cement industry, research has been administered in collection of latest material and up gradation of technology. In India 93% of the cement industry uses dry process technology which is

environment friendly. The old dry process technology and semi dry process technology is being used by 7% of cement industry.

The global warming is caused by the emission of the green house gases, CO<sub>2</sub> contributes about 65 % of Global warming. It is estimated that the production of cement will increase from about 1.5 billions tons in 1995 to 2.2 million tons in 2015. The cement industry is held responsible for some of the CO<sub>2</sub> emissions, because the production of one ton of Portland cement emits approximately one ton of CO<sub>2</sub> into the atmosphere. The environment must be protected by preventing dumping of waste by products materials in uncontrolled manners. Several efforts are in progress to address these issues. These include the utilization of supplementary cementing materials such as fly ash, silica fume, granular blast furnace slag, rice-husk ash and metakaolin and the development of alternative binders to Portland cement.

There is reduction in emission level of CO<sub>2</sub> due to the waste heat recovery in cement plant. After steel and aluminium, cement is that the next material which produces high energy. It also uses an ample amount of non - renewable materials, e.g. coal, lime stone etc. About 65% of global warming is caused by CO<sub>2</sub>. The cement industry is not suitable for sustainable industry since it causes high pollution to the environment. So, there's necessity for alternate material for cement within the concrete which should be eco-friendly, should satisfy mechanical properties and sturdiness characteristics.

This new material should be more superior, preferable compared to conventional concrete based on cement. In 1978 Davidovits introduced Geo-polymer as new material for cement and describes the composition of mineral binder which is similar to zeolites with amorphous micro-structure. The ordinary hydraulic cement doesn't require silicon silicate hydration process to urge homogeneous mix and mechanical properties to urge desired strength, there's need of polycondensation of silica and alumina.

Geo-polymer material and alkaline binder solutions are main constituent to form Geo-polymer. The Geo-polymer material should be rich in silicon and aluminium. Fly ash, red mud, GGBS and rice husk ash which are the source materials for Geo-polymer. To create three dimensional polymeric chain and structure it's necessary to possess silica and alumina of ash consisting of Si-O. The rate of concentration of solids is higher in aluminium silicate gel during Geo-polymerisation reaction.

The alkaline liquids help to activate minerals containing reactive silicon and aluminium which helps to get inorganic polymeric material. It is found that fly ash and GGBS are best source material for Geo-polymeric system to get satisfactory strength in Geo-polymer concrete. The alkaline activator solutions help to activate fly ash, GGBS in concrete, which are easily available in India. The preparation of Geo-polymer concrete is same as conventional concrete, which uses alkaline activator solution (AAS) instead of water which acts as binder for the concrete.

## 2. Experimental Program

A comprehensive experimental program was developed to evaluate the effects of construction and demolition waste replacement percentages on strength characteristics and flexural behavior of Geo-polymer concrete. Four replacement percentages of 0%, 20%, 40%, 60% were investigated. Furthermore, to compare the performance of normal Geo-polymer concrete and Construction And Demolition Waste mixed Geo-polymer Concrete.

### 2.1. Materials

#### 2.1.1. Fly Ash

Fly ash is a fine powder that is a by-product of burning pulverized coal in electric generation power plants. Fly ash is a pozzolanic material, a substance containing aluminous and siliceous material that forms cement in the presence of water. Class F fly ash is used in this project

#### 2.1.2. GGBS (Ground Granulated Blast-furnace Slag)

It is a cementitious material whose main use is in concrete and is a by-product from the blast-furnaces used to make iron.

#### 2.1.3. Super plasticizer

Super plasticizers are mostly used where high strength of concrete will be required and this also gives higher slump value without the increment in amount of water content.

#### 2.1.4. Fine aggregate

It is added to concrete to assist workability and to prevent bleeding and segregation of the cement paste and coarse aggregate during its transportation. Aggregate which passed through 4.75mm IS Sieve and retained on 75 micron (0.075mm) IS Sieve is termed as fine aggregate.

#### 2.1.5. Coarse aggregate

It is used primarily for the purpose of providing bulkiness to concrete. Coarse aggregates containing flat, elongated or flaky pieces or mica should be rejected. The grading of coarse aggregates should be as per specifications of IS 383 (1970).

#### 2.1.6. Construction Demolition Waste

C&D waste was been replaced in place of Coarse aggregate in various ratios ( 20%, 40%, 60%). C&D aggregates containing flat, elongated or flaky pieces or mica should be sieved and used. In this project, 20mm size aggregate is used.

#### 2.1.7. Water

Water as per Ph standards- Ph range from 6.5 to 7.5. normally used for all construction purposes.

2.2. Preliminary Tests

2.2.1. Water Absorption

The pycnometer is dried thoroughly and its weight is taken as W1. Fill two third part of pycnometer with sand and is weighed as W2. The pycnometer is filled with water upto the top without removing the sand. Then it is shaken well and stirred thoroughly with the glass rod to remove the entrapped air. After the air has been removed, the pycnometer is completely filled with water upto the mark. Then outside of the pycnometer is dried with a clean cloth and is weighed as W3. The pycnometer is cleaned thoroughly and then completely filled with water upto the top. Then the outside of the pycnometer is dried with a clean cloth and is weighed.

A. Fine Aggregate

Weight of the vessel containing sample and filled with distilled water only, A = 1849.2g

Weight of the vessel filled with distilled water only, B = 1540g

Weight of the Saturated Surface Dried Sample, C = 500g

Weight of oven dried sample, D= 488 g

Specific Gravity =	$\frac{D}{C-(A-B)}$	= 2.62
Water Absorption =	$\frac{100(C-D)}{D}$	= 2.67 %

Coarse Aggregate

The test procedure is same as that of specific gravity of coarse aggregate.

For 20 mm size, 600g of coarse aggregates were taken.

Weight of the vessel containing sample and filled with distilled water only, A = 1922

Weight of the vessel filled with distilled water only, B = 1540g

Weight of the Saturated Surface Dried Sample,C = 600g

Weight of oven dried sample,D=598 g

Specific Gravity =	$\frac{D}{C-(A-B)}$	= 2.74
Water Absorption =	$\frac{100(C-D)}{D}$	= 0.42%

Construction And Demolition Waste

The test procedure is same as that of specific gravity of construction and demolition waste.

For 20mm size, 600g of construction and demolition waste were taken.

Weight of the vessel containing sample and filled with distilled water only, A = 2000 g

Weight of the vessel filled with distilled water only, B = 1640g

Weight of the Saturated Surface Dried Sample, C = 665g

Weight of oven dried sample, D= 600 g

#### Sieve Analysis

The sample is brought to an air-dry condition before weighing and sieving. This may be achieved either by drying at room temperature or heating at a temperature of 1000<sup>0</sup> C to 1100<sup>0</sup> C. The air-dry sample 1kg was taken and sieved successively on the appropriate sieves starting with the largest size sieve as stated in the table. Sieving is carried out manually.



*Figure 2.2. Course Aggregate Sieve*

### 3. Tests

#### 3.1. Test on Fresh Concrete

In order to determine the workability of fresh concrete for conventional concrete, the slump test and compaction factor test were conducted as per IS 1199 : 1959.

##### 3.1.1. Slum Cone Test

Slump test is used to determine the workability of fresh concrete. The apparatus used for doing slump test are Slump Cone and Tamping rod. The slump test is the most widely, primarily because of the simplicity of the apparatus required and the test procedure. The slump test indicates the behavior of a compacted concrete cone under the action of gravitational forces. The internal surface of the mould is thoroughly cleaned and freed from superfluous moisture and adherence of any old set concrete before commencing the test. The mould is then filled in four layers, each 1/3 of the height of the mould, each layer being tamped 25 times with a standard tamping rod taking care to distribute the strokes evenly over the cross section. After top layer has been damped, the concrete is struck off level with a trowel and tamping rod sample. The mould is removed from the concrete immediately by raising it slowly and carefully in a vertical direction. This allowed concrete to subside. This subsidence is referred as slump of concrete. The difference in level between the height of the mould and that of the highest point of the subside concrete is measured.

This difference in height in mm and is taken as slump of concrete.

The slump value is 140 mm.

**3.2. Test on Harden Concrete**

One of the purposes of testing hardened concrete is to confirm that the concrete used at site has developed the required strength. Testing of hardened concrete plays an important role in controlling and confirming the quality of cement concrete works. Systematic testing of raw materials, fresh and hardened concrete are inseparable part of any quality control programs for concrete, which helps to achieve higher efficiency of the material used and greater assurance of the performance of the concrete with regard to both strength and durability. The test methods be simple, direct and convenient to apply. The controlled concrete is cast and cured for certain curing time and the tests for hardened concrete such as compressive strength, split tensile strength were done.

**3.2.1. Ultrasonic Pulse Velocity Test**

Ultrasonic pulse velocity test consists of measuring travel time, T of ultrasonic pulse of 50 to 54 kHz, produced by an electro-acoustical transducer, held in contact with one surface of the concrete member under test and receiving the same by a similar transducer in contact with the surface at the other end.

With the path length L, (i.e. the distance between the two probes) and time of travel T, the pulse velocity ( $V=L/T$ ) is calculated.

The ultrasonic pulse velocity depends on the density and elastic properties of the material being tested. The influence of path length will be negligible provided it is not less than 100mm when 20mm size aggregate is used.

Pulse velocity will not be influenced by the shape of the specimen, provided its least lateral dimension is not less than the wavelength of the pulse vibrations.

□ The moisture content of the concrete can have a small but significant influence on the pulse velocity. In general, the velocity is increased with increase in moisture content, the influence being more marked for lower quality concrete.



Figure 4.2.1. Ultrasonic Pulse Velocity Test

**Table 3.2.1.** Concrete based on Ultrasonic Pulse Velocity Test

Pulse Velocity Concrete Quality	
>4.0 km/s	Very good to excellent

3.5 km/s – 4.0 km/s	Good to very good, slight porosity may exist
3.0 km/s – 3.5 km/s	Satisfactory but loss of integrity is suspected
<3.0 km/s	Poor and loss of integrity

3.2.2. Compressive Strength

The compressive strength test for cubes was conducted in compression testing machine as per IS 516: 1964. The cubes were tested in compressive testing machine at the rate of 140 kg/cm<sup>2</sup> /min, and the ultimate loads were recorded. The bearing surface of machine was wiped off clean and the surface of the specimen was cleaned. The specimen was placed in machine in such a manner, load was applied to opposite sides of the cubes such that casted side of specimen was not top and bottom. The axis of the specimen was carefully aligned at the center of loading frame. The load applied was increased continuously at a constant rate until the resistance of the specimen to the increasing load breaks down and no longer can be sustained. Maximum load applied on specimen was recorded.

Compressive strength = P / A

Where, P = Maximum load applied (N) , A = Cross sectional area of specimen (mm<sup>2</sup> )



Figure4.2.2. Compression Test

3.2.3. Split Tensile Test

The split tensile strength test for cylinders was carried out as per IS 516: 1964. This test was carried out by placing a cylinder specimen horizontally between the loading surfaces of a universal testing machine and the load was applied until failure of the cylinder along the vertical diameter.

When the load was applied along the generation element on the vertical diameter, the cylinder is subjected to a horizontal stress and the split tensile strength was found using subsequent formula. The split tensile strength of cylinders at 7 days and 28 days is as shown .

Split tensile strength,  $f_{ck}(N/mm^2) = 2P/\pi LD$

Where,

P = Ultimate load (N)

L = Length of cylinder (mm)

D = Diameter of cylinder (mm)



Figure 4.2.3. Split Tensile Test

#### 4. Results And Discussions

##### 4.1. Ultrasonic Pulse Velocity Test

In this, Geopolymer concrete with C & D waste 40% and 60% ratio has very good concrete quality when compared to other geopolymer concrete mix. Out of this, Geopolymer concrete with C & D waste 20% good to very good, slight porosity may exist.

Table 4.1. Ultra Sonic Pulse Velocity Test

	SE T O	SE T A	SE T B	SE T C
Pulse Velocit y	4.4 6	3.9 20	4.1 92	4.3 2

##### 4.2. Compressive Strength

The compressive strength test results for different duration period in ambient curing. The compressive strength increased with time for all the mixes.

Table 4.2.1. 3 Days Compressive Strength

S e t	Sam ple Nu mbe r	We igh t Kg	Lo ad kN	Ar ea m m <sup>2</sup>	Str ess N/ m <sup>2</sup>	Ave rage N/m <sup>2</sup>
O	1	2.4	277	10	27.	24.9
	2	46	.6	00	7	
	3	2.4	293	0	29.	
		7	.6	10	36	



		2.3 56	260	00 0 10 00 0	26. 0	
A	1	2.4	174	10	17.	11.6 9
	2	9 .4		00	44	
	3	2.6	209	0	20.	
		7 .6		10	96	
		2.5	140	00	14.	
		5		0 10 00 0	0	
B	1	2.5	188	10	18.	15.0 19
	2	2.4	156	00	8	
	3	6 .6		0	15.	
		2.4	196	10	66	
		1		00	19.	
				0 10 00 0	6	
C	1	2.3	89.	10	18.	15.7 3
	2	9 6		00	96	
	3	2.4	160	0	16.	
		6 .4		10	04	
		2.3	174	00	17.	
		9 .4		0 10 00 0	44	

Table 4.2.2. 7 Days Compressive Strength

<i>S</i> <i>e</i> <i>t</i>	<i>Sam</i> <i>ple</i> <i>Nu</i> <i>mbe</i> <i>r</i>	<i>We</i> <i>igh</i> <i>t</i> <i>Kg</i>	<i>Lo</i> <i>ad</i> <i>kN</i>	<i>Ar</i> <i>ea</i> <i>m</i> <i>m</i> <sup>2</sup>	<i>Str</i> <i>ess</i> <i>N/</i> <i>m</i> <i>m</i> <sup>2</sup>	<i>Ave</i> <i>rage</i> <i>N/m</i> <i>m</i> <sup>2</sup>
O	1	2.4	389	10	38.	31.3 8
	2	2 .6		00	96	
	3	2.4	396	0	39.	
		35 .0		10	6	
		2.4	325	00	32.	
		64		0 10	5	

				00		
				0		
A	1	2.3	281	10	28.	26.1 18
	2	8	.6	00	16	
	3	2.5	348	0	34.	
		0	316	10	8	
		2.4	.8	00	31.	
		2		0	6	
				10		
				00		
				0		
B	1	2.4	353	10	35.	32.3 5
	2	1	.6	00	36	
	3	2.3	329	0	32.	
		7	.6	10	96	
		2.4	343	00	34.	
		8	.6	0	36	
				10		
				00		
				0		
C	1	2.3	397	10	39.	37.5 8
	2	9	.6	00	76	
	3	2.3	388	0	38.	
		4	384	10	8	
		2.3		00	38.	
		4		0	4	
				10		
				00		
				0		

Table 4.2.2. 28 Days Compressive Strength

<i>S</i> <i>e</i> <i>t</i>	<i>S</i> <i>a</i> <i>m</i> <i>p</i> <i>l</i> <i>e</i> <i>N</i> <i>u</i> <i>m</i> <i>b</i> <i>e</i> <i>r</i>	<i>W</i> <i>e</i> <i>i</i> <i>g</i> <i>h</i> <i>t</i> <i>K</i> <i>g</i>	<i>L</i> <i>o</i> <i>a</i> <i>d</i> <i>k</i> <i>N</i>	<i>A</i> <i>r</i> <i>e</i> <i>a</i> <i>m</i> <i>m</i> <sup>2</sup>	<i>S</i> <i>t</i> <i>r</i> <i>e</i> <i>s</i> <i>s</i> <i>N</i> <i>/</i> <i>m</i> <i>m</i> <sup>2</sup>	<i>A</i> <i>v</i> <i>e</i> <i>r</i> <i>a</i> <i>g</i> <i>e</i> <i>N</i> <i>/</i> <i>m</i> <i>m</i> <sup>2</sup>
O	1	2.4	476	10	47.	43.4 7
	2	8	452	00	6	
	3	2.5	502	0	45.	
		5		10	2	
		2.5		00	50.	
	4		0	2		
				10		
				00		

				0		
A	1	2.6	340	10	34.	33.3
	2	1	382	00	0	
	3	2.5	373	0	38.	
	4			10	2	
	2.6			00	37.	
	5			0	3	
B	1	2.5	381	10	38.	33.7
	2	3	352	00	1	
	3	2.5	364	0	35.	
	4			10	2	
	2.5			00	36.	
	6			0	4	
C	1	2.5	433	10	43.	40.2
	2	8	445	00	3	
	3	2.5	410	0	44.	
	0			10	5	
	2.4			00	41.	
	5			0	0	

#### 4.3. Split Tensile Strength

The split tensile strength test results for different duration period in ambient curing (7,14 & 28 days). The tensile strength varies from 1.54 MPa from 7 days to 2.66 MPa at 28 days for 60 % partial replacement of C & D waste. The rate of increase of strength for all the mixes showed a similar trend of increase. This indicates that, the behaviour of Geo-polymer concrete is almost similar to the conventional concrete


**Table 4.3.1.** 7 Days Split Tensile Strength

<i>S</i> <i>et</i>	<i>Samp</i> <i>le</i> <i>Num</i> <i>ber</i>	<i>Wei</i> <i>ght</i> <i>Kg</i>	<i>Loa</i> <i>d</i> <i>kN</i>	<i>Stre</i> <i>ss</i> <i>N/m</i> <i>m<sup>2</sup></i>	<i>Avera</i> <i>ge</i> <i>N/mm</i> <i>2</i>
O	1	3.81	73.6	2.34	2.75
	2	4	61.6	1.96	
		3.78			

A	1	3.76	22	1.0	1.275
	2	3.77	48.8	1.55	
B	1	3.67	47.8	1.52	1.714
	2	3.78	60	1.90	5
C	1	3.76	44	1.4	1.545
	2	3.64	53.2	1.69	

**Table 4.3.2.** 28 Days Split Tensile Strength

<i>S</i> <i>et</i>	<i>Samp</i> <i>le</i> <i>Num</i> <i>ber</i>	<i>Wei</i> <i>ght</i> <i>Kg</i>	<i>Loa</i> <i>d</i> <i>kN</i>	<i>Stre</i> <i>ss</i> <i>N/m</i> <i>m</i> <sup>2</sup>	<i>Avera</i> <i>ge</i> <i>N/mm</i> <i>2</i>
O	1	3.75	110.	3.52	3.278
	2	0	6	3.03	
A	1	3.75	95.4	6	
	2	0			
A	1	3.73	58	2.84	2.53
	2	3.75	70	2.22	
B	1	3.71	54.4	2.59	2.56
	2	3.54	50	2.08	
C	1	3.64	50	2.59	2.66
	2	3.67	46.5	2.73	

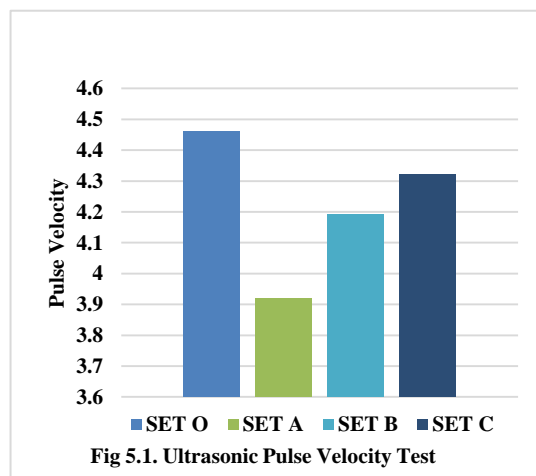

**Fig 5.1.** Ultrasonic Pulse Velocity Test

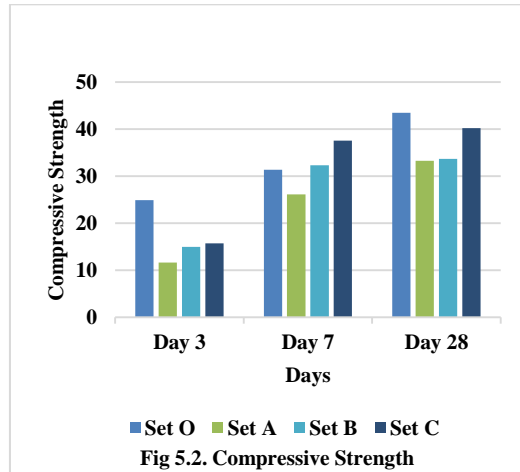


Fig 5.2. Compressive Strength

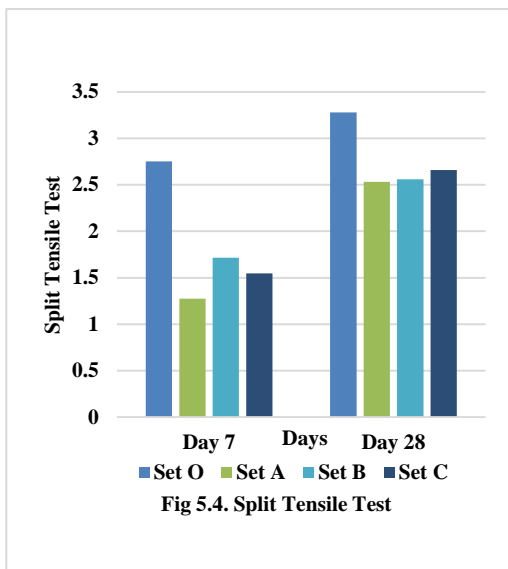


Fig 5.4. Split Tensile Test

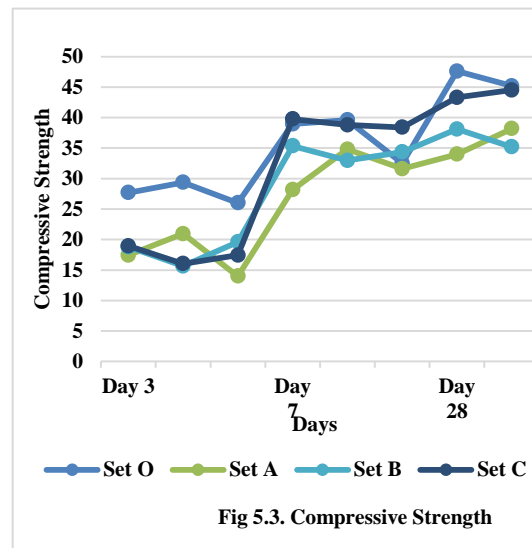


Fig 5.3. Compressive Strength

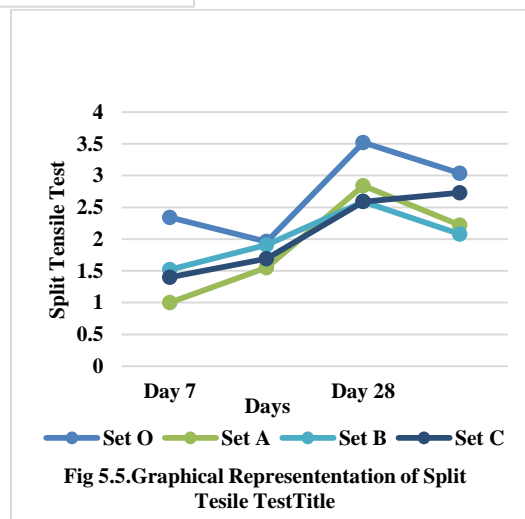


Fig 5.5. Graphical Representation of Split Tensile Test

Set O - Normal Geo-polymer Concrete  
 Set A - 20% Replacement of C.A. With C& D waste  
 Set B - 40% Replacement of C.A. With C& D waste  
 Set C - 60% Replacement of C.A. With C& D waste

## 5. Conclusion

This paper presents preliminary study on the effect of strength characteristics and flexural behavior of Geo-polymer concrete with Construction Demolition Waste. The Strength properties are measured at 7 and 28 days while the flexural properties are measured at 28 days. Based on limited mechanical and durability properties the following conclusions be made:

1. The compressive strength of Geo-polymer Concrete shows good results when compared to Conventional Concrete at 28 days at ambient curing.
2. The partial replacement of 60% C & D waste to Coarse Aggregate gives the optimum value.
3. The compressive strength of Geo-polymer concrete 60% C & D waste to Coarse Aggregate of shows high compressive strength values when compared to Conventional Concrete specimens at 28 days.
4. There is an improvement in strength for the partial replacement levels of C & D waste to Coarse aggregate.
5. The Split Tensile Strength of Geo-polymer Concrete shows 72 % increase in results when compared to Conventional Concrete at 28 days.
6. There was no Water Absorption in Geo-polymer Concrete as well as conventional concrete take place.
7. The Geo-polymer concrete with 60% C & D waste has very good concrete quality compared to other Geo-polymer concrete mixes.
8. From the fig 51. we can find out that Ultrasonic Pulse Velocity values for different mix proportions. In this, Geopolymer concrete with C & D waste 40% and 60% ratio has very good concrete quality when compared to other geopolymer concrete mix. Out of this, Geopolymer concrete with C & D waste 20% good to very good, slight porosity may exist.

## REFERENCE

1. A.DeRossia, M.J. Ribeiro(2019) "Effect Of The Particle Size Range Of Construction And Demolition Wasteon The Fresh And Hardened-State Properties Of Fly Ash-Basedgeopolymer Mortars With Total Replacement Of Sand"
2. Alexander Vásquez, Venus Cárdenas (2016) "Geopolymer Based On Concrete Demolition Waste"
3. Lavanya Prabha, S., Gopalakrishnan, M., Neelamegam, M., Development of high-strength nano-cementitious composites using copper slag, *ACI Materials Journal*, 2020, 117(4), pp. 37–46.
4. Mohan, A , Vijayan, D.S. , Revathy, J., Parthiban, D., Varatharajan, R. Evaluation of the impact of thermal performance on various building bricks and blocks: A review, *Environmental Technology and Innovation*, 2021, 23, 101577
5. M. Tholkapiyan, A.Mohan, Vijayan.D.S, A survey of recent studies on chlorophyll variation in Indian coastal waters, *IOP Conf. Series: Materials Science and Engineering* 993 (2020) 012041, 1-6.
6. Gopalakrishnan, R., Mohan, A., Sankar, L. P., & Vijayan, D. S. (2020). Characterisation On Toughness Property Of Self-Compacting Fibre Reinforced Concrete. In *Journal of Environmental Protection and Ecology* (Vol. 21, Issue 6, pp. 2153–2163).
7. Lavanya Prabha, S., Dattatreya, J.K., Neelamegam, M., Seshagiri Rao, M.V., Investigation of bolted RPC plate under direct tension, *Journal of Structural Engineering (Madras)*, 2009, 36(5), pp. 333–341
8. Mohan, A., Tabish Hayat, M. Characterization of mechanical properties by preferential supplant of cement with GGBS and silica fume in concrete, *Materials Today: Proceedings*, 2020, 43, pp. 1179–1189.

9. Dharmar, S., Gopalakrishnan, R., Mohan, A. Environmental effect of denitrification of structural glass by coating TiO<sub>2</sub>, *Materials Today: Proceedings*, 2020, 45, pp. 6454–6458
10. Cheong, K.H. and Lee, S.C., (1993). "Strength of Retempered Concrete", *ACI Materials J.* 90(3), 203-206
11. Mohan, A., Selvendran, Priya, S. Electrokinetic remediation: An innovation for heavy metal contamination in the soil environment, *Materials Today: Proceedings*, 2020, 37(Part 2), pp. 2730–2734.
12. Kiruthika, C., Lavanya Prabha, S., Neelamegam, M. Different aspects of polyester polymer concrete for sustainable construction *Materials Today: Proceedings*, 2020, 43, pp. 1622–1625
13. Prabha, S.L., Surendar, M., Neelamegam, M., Experimental investigation of eco-friendly mortar using industrial wastes, *Journal of Green Engineering*, 2019, 9(4), pp. 626–637
14. Anuar K.A., Ridzuan A.R.M. (2011) "Strength Characteristic Of Geopolymer Concrete Containing Recycled Concrete Aggregate"
15. C. Arenas, Y. Luna-Galiano (2017) "Development Of a Fly Ash-Based Geopolymeric Concrete With Construction And Demolition Wastes As Aggregates In Acoustic Barriers"
16. Faiz Uddin Ahmed Shaikh (2016) "Mechanical And Durability Properties Of Fly Ash Geopolymer Concrete Containing Recycled Coarse Aggregates"
17. Jianhe Xie, Wei Chen (2019) "Coupling Effects Of Recycled Aggregate And Ggbs/Metakaolin On Physicochemical Properties Of Geopolymer Concrete"
18. Jianhe Xie, Junjie Wang (2018), "Effects Of Combined Usage Of Ggbs And Fly Ash On Workability And Mechanical Properties Of Alkali Activated Geopolymer Concrete With Recycled Aggregate"
19. Jianzhuang Xiao, Zhiming Ma (2018) "Mechanical Properties Of Concrete Mixed With Recycled Powder Produced From Construction And Demolish Waste"
20. M. Bassani, L. Tefa (2019) "Alkali-Activation Of Aggregate Fines From Construction And Demolition Waste: Valorisation In View Of Road Pavement Subbase Applications"
21. M. Bassani, L. Tefa (2019) "Alkali-Activation Of Recycled Construction And Demolition Waste Aggregate With No Added Binder"
22. Matteo Panizza, Marco Natali (2018) "Assessment Of Geopolymers With Construction And Demolition Waste (Cdw) Aggregates As a Building Material"
23. Peem Nuaklong, Vanchai Sata, Prinya Chindaprasirt (2015) "Influence Of Recycled Aggregate On Fly Ash Geopolymer Concrete Properties"
24. S. Mesgari, A. Akbarnezhad (2020) "Recycled Geopolymer Aggregates As Coarse Aggregates For Portland Cement Concrete And Geopolymer Concrete: Effects On Mechanical Properties"